




2. THWN, THWN-2, THHW, THHN

Production standard: UL 83

1. Conductor: single conductor 14 AWG to 750 KCMIL, copper or aluminium alloy 8000series.
2. Insulation: Polyvinyl chloride (PVC)
3. Jacket: Nylon
4. Specifications: Heat and moisture-resistant, flame retardant, RoHS compliant
5. Voltage: 600V

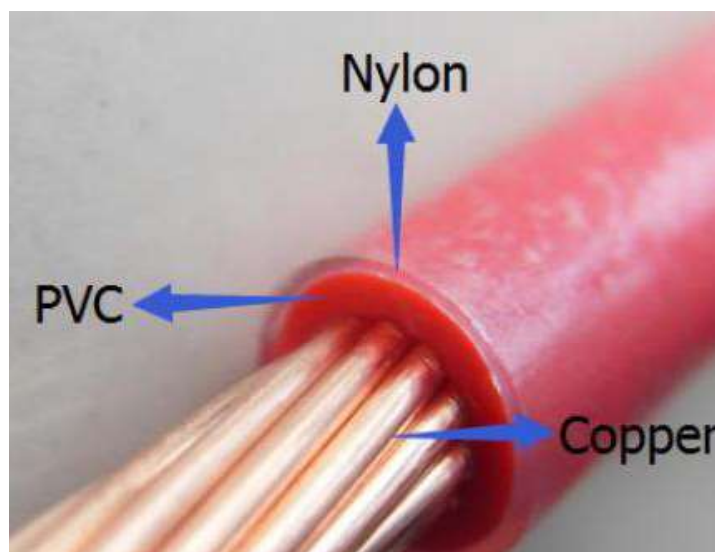

Size (AWG or Kcmil)	Nos of strands	Insulation		Jacket	
		inch	mm	mm	inch
14	1	0.015	0.38	0.004	0.1
12	1	0.015	0.38	0.004	0.1
10	1	0.020	0.51	0.004	0.1
14	19	0.015	0.38	0.004	0.1
12	19	0.015	0.38	0.004	0.1
10	19	0.020	0.51	0.004	0.1
8	19	0.030	0.76	0.005	0.13
6	19	0.030	0.76	0.005	0.13
4	19	0.040	1.02	0.006	0.15
3	19	0.040	1.02	0.006	0.15
2	19	0.040	1.02	0.006	0.15
1	19	0.050	1.27	0.007	0.18
1/0	19	0.050	1.27	0.007	0.18
2/0	19	0.050	1.27	0.007	0.18
3/0	19	0.050	1.27	0.007	0.18
4/0	19	0.050	1.27	0.007	0.18
250	37	0.060	1.52	0.008	0.20

Please contact us at sales@pulinglobal.com if the cable/wire you are looking for is not included in the list